


# MAG 800-S

## High speed DC Servo motor

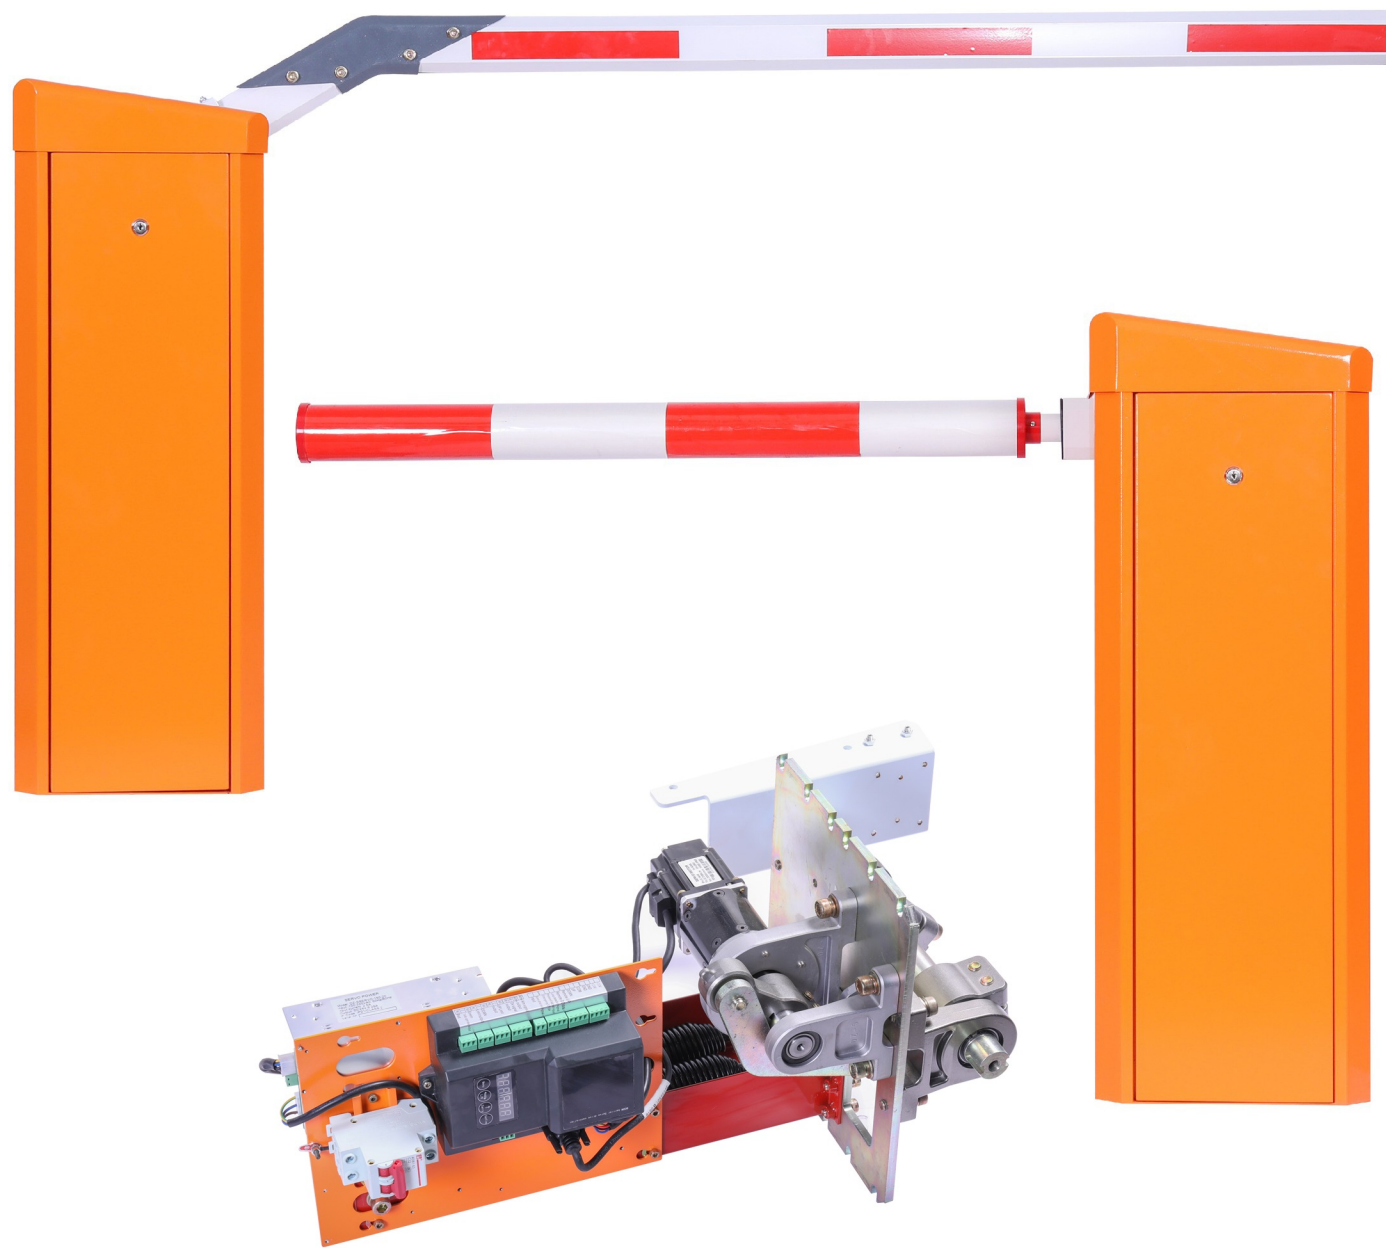

### Product Features

#### MAG 800-S

- More than 10 million operation times lifetime or 35,000 times a day.
- Molding production : high precision, fast efficiency and guaranteed quality.
- Planetary transmission : no clutch design, gate opening by manually when power off, no blocking, no oil leakages, large torque, low noise
- Special servo controller : use integrated chip drive, fast processing speed,
- Server motor design : low consumption, high efficiency, no overheat, wide speed adjustment.

### Product Specification

Working Temperature	-45 °C~+85 °C
Main power supply	220VAC 50Hz
Motor power supply	24VDC
Open/Close Speed	0.9 - 8 Sec (adjustable)
Rate Power	100W
Driving Method	Servo motor
Humidity	≤ 90%
Remote control distance	≤ 100m.
Protection Grade	IP55
Motor No-load Speed	3000rpm.
Max Boom Length	3-6M
MTBF	10M
Certificate	ISO9001, CE, FC, RoHS